

107. VENT FILTER



Function:

- Vent filter housing is used on process tanks and condensate vessels for venting purpose.
- The housing is designed to accept a non-woven polypropylene/ PTFE membrane filter suitable for low pressure flash steam, air, gas and aggressive fluids.

Specifications:

- Housing material: AISI 316L.
- Elastomer: EPDM
- Inlet connection 1.5" Triclover
- Outlet connection: 1.5" Triclover
- Maximum operating pressure: 10 bar
- Maximum operating temperature: 180 C
- Internal finish: Polished Ra<0.5μ., Electropolished
- External finish: Polished Finish

Cartridge connections: Accepts single open end cartridge filter having a 2.25" outer diameter and fitted with an internal, -116 O ring style adaptor.

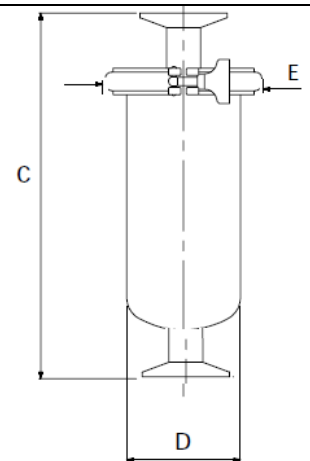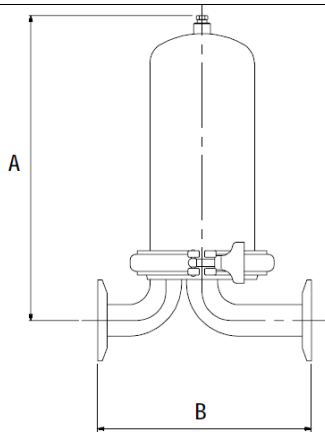

ORDERING INFORMATION:

	A (mm)	B (mm)	C (mm)	øD (mm)	E (mm)	Part#
In line	-	-	203	76.2	130	107.000.000
T-line	203	177	-	-	-	107.000.001

All dimensions are in mm. unless and otherwise specified.

The information contained in this brochure is for guidance only. We reserve the right to modify any material or feature without notice in advance. For further information, please, consult our application specialist.

GEOMETRY ENGINEERING INNOVATION,

No 4, Basaveshwara Industrial Area, Rajagopalnagar Main road, Bangalore-560056

www.geiprocess.com. E-mail: info@geiprocess.com